



EN

Compact Pumps

Hidrostal Screw Centrifugal Compact Pumps are portable, heavy duty field units which combine usability and robustness with the superior hydraulic and solid handling performance of the famous screw centrifugal impeller.



Compact Pumps - small, portable and ready to use whenever needed.

Hidrostal compact pumps allow non-clogging, trouble-free operation in demanding situations. They are used in slurry and wastewater applications, by emergency management / fire brigades, on construction sites and even in private households.

Hidrostal compact pumps are heavy duty field units which combine usability and robustness with the superior hydraulic and solid handling performance of the famous screw centrifugal impeller. This makes it the preferred pump for all type of municipal and industrial wastewater, slurry and mud but also flood defense applications for portable but also stationary installations.

Typical Applications

- Industrial effluent
- Viscous sludge
- Return activated sludge
- Drainage
- Process waste
- Sump cleanup
- Construction sites
- Flood defense
- Emergency management / fire brigades

Specifications


- Discharge Sizes: 50 - 80 mm (2 - 3")
- Suction Sizes: 50 - 80 mm (2 - 3")
- Head: 0.5 - 21 m (2 - 70 ft)
- Flow: 0.8 - 25 l/s (12 - 400 gpm)
- Power: 0.1 - 2.4 kW (0.1 - 3.2 HP)
- Frequencies: 50 Hz, 60 Hz, VFD
- Materials: Cast Iron, Ductile Iron, Hi-Chrome, Stainless Steel, Duplex



Product Highlights

Product Advantages

- Solids handling of 50 mm (2") in diameter
- Robust unit capable of handling liquids containing fibrous matter
- Steep curve giving pressure reserve when pumping thick materials
- Mobile with a weight of 32 kg (70 lbs) including 10 m (33 ft) cable
- High efficiency and compact construction
- Non-overloading power curve
- Double mechanical seal arrangement
- Ex-proof execution available

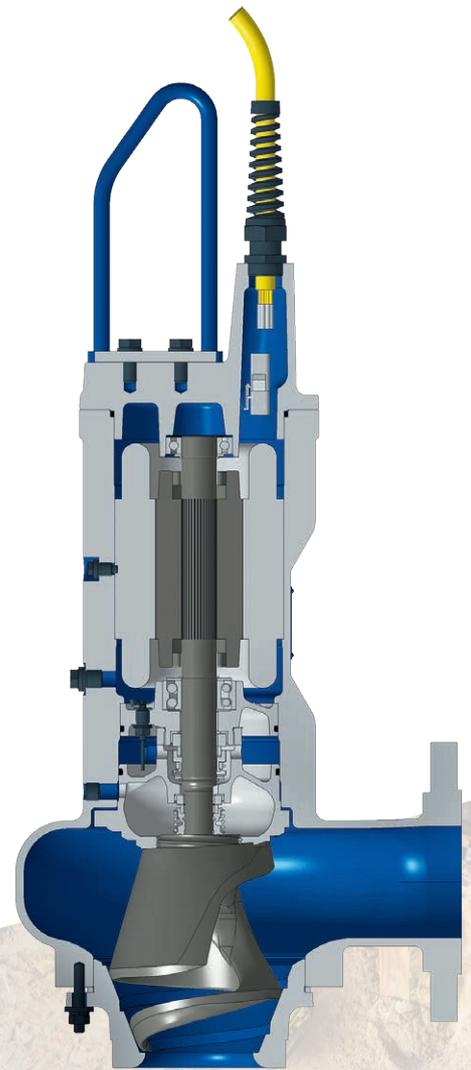

Hidrostal

Hidrostal Pump Applications

Due to their outstanding characteristics, Hidrostal pumps are used in numerous municipal and industrial sectors. They pump the most diverse fluids and materials gently and with low pulsation. Our specialists select the suitable material combinations and individually adapt every pump to the local conditions. We ensure with this process that Hidrostal pumps are successful in difficult applications and achieve the best results with respect to performance, energy efficiency and low life-cycle costs.

- clog-free pumping
- high suction capacity
- gentle delivery due to low shear forces
- high efficiency
- stable, steep pump curve
- long service life
- low pulsation
- continuous flow proportional to the speed
- high pressure stability across a wide speed range

